

TECHNICAL DATA SHEET

Epsilon Advanced Conductor 240 - 47

High Temperature Low Sag Conductors

EPSILON
CABLE

International size **GLASGOW**

ASTM Size **WACO**



Governing Units: Metric to US Customary (Unit conversion)

STRANDING CONFIGURATION

		Metric			US Customary	
	No. & Diameter of composite core	1 x 7.75	mm		1 x 0.305	in.
	Aluminum layers construction / Height	18 TW x	2.95	mm	0.116	in.
	1st layer composition and ϕ_{eq}	7 x	4.14	mm	0.163	in.
	2nd layer composition and ϕ_{eq}	11 x	4.08	mm	0.161	in.
	Lay Direction of outer layer	Right Hand (Z)				

CONDUCTOR PROPERTIES


Cross Sectional Area - Annealed Aluminum (1350-O at 63%IACS)	238.2	mm ²	470.0	kcmil
Cross Sectional Area - Composite Core	47.2	mm ²	0.0731	in. ²
Total Area of Conductor Cross Section	285.3	mm ²	0.4423	in. ²
Nominal equivalent Aluminum Area (1350-H19 at 61%IACS)	246.0	mm ²	485.4	kcmil
Overall Diameter of Conductor	19.55	mm	0.770	in.
Mass per unit length - Annealed Aluminum	659.0	kg/km	442.8	lb/kft
Mass per unit length - Core	87.3	kg/km	58.6	lb/kft
Mass per unit length - Conductor	746.3	kg/km	501.5	lb/kft
Ultimate Tensile Strength of Conductor	120.1	kN	27.0	kips
Core Rated Tensile Strength	105.8	kN	23.8	kips
Coefficient of Linear Expansion Above Thermal Kneepoint	1.3	10 ⁻⁶ K ⁻¹	0.722	10 ⁻⁶ F ⁻¹
Coefficient of Linear Expansion Below Thermal Kneepoint	16.34	10 ⁻⁶ K ⁻¹	9.07	10 ⁻⁶ F ⁻¹
Final Modulus of Elasticity Above Thermal Kneepoint	123	GPa	17.84	Msi
Final Modulus of Elasticity Below Thermal Kneepoint	66	GPa	9.61	Msi

THERMAL SPECIFICATIONS

Maximum Continuous Operating Temperature ⁽²⁾ (surface temperature)	180	°C	356	°F
Maximum Emergency Temperature / 8760 Hours ⁽²⁾ (surface temperature)	200	°C	392	°F
Thermal Heat Capacity for Annealed Aluminum Layers	629.3	W-s/m-°C	106.5	W-s/ft-°F
Thermal Heat Capacity for Composite Core	69.8	W-s/m-°C	11.8	W-s/ft-°F

ELECTRICAL SPECIFICATIONS

Maximum DC Electrical Resistance at 20°C / 68°F (1370-O at 63%IACS)	0.1176	ohm/km	0.1893	ohm/mile
Temperature Coefficient of Resistance	4.07	10 ⁻³ K ⁻¹	2.109	10 ⁻³ F ⁻¹
AC Nominal Resistance at 25°C / 77°F (surface temperature)	0.1210	ohm/km	0.1947	ohm/mile
AC Nominal Resistance at 75°C / 167°F (surface temperature)	0.1447	ohm/km	0.2329	ohm/mile
AC Nominal Resistance at 180°C / 356°F (surface temperature)	0.1948	ohm/km	0.3135	ohm/mile
AC Nominal Resistance at 200°C / 392°F (surface temperature)	0.2043	ohm/km	0.3288	ohm/mile
AC Current Rating at 180°C / 356°F (surface temperature) ⁽¹⁾	1,105 A			
AC Current Rating at 200°C / 392°F (surface temperature) ⁽¹⁾	1,165 A			

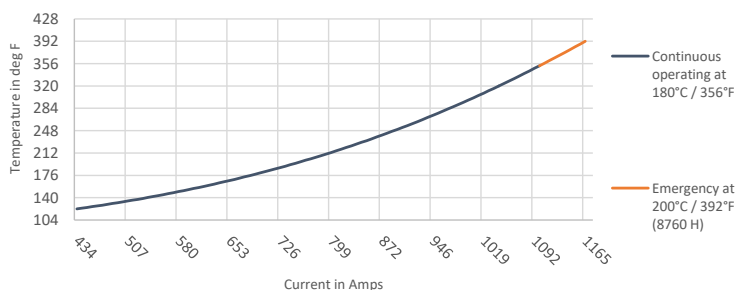

Geometric Mean Radius (GMR)

8.07 mm 0.0265 ft.

Inductive Reactance $\phi 0.3m$ ($\phi 0.98ft$) radius0.228 $\Omega.km^{-1}$ 0.3669 ohm/mileCapacitive Reactance $\phi 0.3m$ ($\phi 0.98ft$) radius0.197 M $\Omega.km$ 0.1224 Mohm-mile

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C / 77 °F ambient temperature, 0.61 m/s (2 ft/s) wind velocity with an angle of 90 °,
 1000 W/m² (92.9 W/ft²) solar radiation, 0.5 solar absorption coefficient,
 0.6 emissivity coefficient, Resistance AC at 60 Hz current frequency.

(2) Temperatures defined according to ASTM B987-20.

Reference standards for core properties: ASTM B987-20.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Rated specifications may slightly change depending on conductor manufacturer.

Revision 01

Ref. Document ST21-00093

Date 12-Sep-2023

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.comwww.epsilon-cable.com