

TECHNICAL DATA SHEET
Epsilon Advanced Conductor 750 - 87

High Temperature Low Sag Conductors

**EPSILON
CABLE**


 International size **WARWICK**

ASTM Size -



Governing Units: Metric to US Customary (Unit conversion)

STRANDING CONFIGURATION

	Metric		US Customary			
	No. & Diameter of composite core	1 x 10.54	mm	1 x 0.415	in.	
	Aluminum layers construction / Height	36 TW x	3.81	mm	0.150	in.
	1st layer composition and Øeq	8 x	5.12	mm	0.202	in.
	2nd layer composition and Øeq	12 x	5.16	mm	0.203	in.
	3st layer composition and Øeq	16 x	5.16	mm	0.203	in.
Lay Direction of outer layer	Right Hand (Z)					

CONDUCTOR PROPERTIES

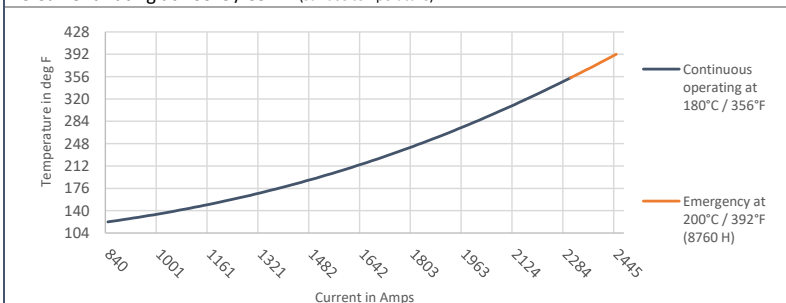
Cross Sectional Area - Annealed Aluminum (1350-O at 63%IACS)	750.7	mm ²	1481.6	kcmil
Cross Sectional Area - Composite Core	87.3	mm ²	0.1352	in. ²
Total Area of Conductor Cross Section	838.0	mm ²	1.2989	in. ²
Nominal equivalent Aluminum Area (1350-H19 at 61%IACS)	775.3	mm ²	1530.2	kcmil
Overall Diameter of Conductor	33.4	mm	1.315	in.
Mass per unit length - Annealed Aluminum	2,074.5	kg/km	1,394.0	lb/kft
Mass per unit length - Core	161.4	kg/km	108.5	lb/kft
Mass per unit length - Conductor	2,235.9	kg/km	1,502.4	lb/kft
Ultimate Tensile Strength of Conductor	240.8	kN	54.1	kips
Core Rated Tensile Strength	195.8	kN	44.0	kips
Coefficient of Linear Expansion Above Thermal Kneepoint	1.3	10 ⁻⁶ K ⁻¹	0.722	10 ⁻⁶ F ⁻¹
Coefficient of Linear Expansion Below Thermal Kneepoint	18.52	10 ⁻⁶ K ⁻¹	10.29	10 ⁻⁶ F ⁻¹
Final Modulus of Elasticity Above Thermal Kneepoint	123	GPa	17.84	Msi
Final Modulus of Elasticity Below Thermal Kneepoint	62	GPa	9.00	Msi

THERMAL SPECIFICATIONS

Maximum Continuous Operating Temperature ⁽²⁾ (surface temperature)	180	°C	356	°F
Maximum Emergency Temperature / 8760 Hours ⁽²⁾ (surface temperature)	200	°C	392	°F
Thermal Heat Capacity for Annealed Aluminum Layers	1,981.1	W-s/m-°C	335.3	W-s/ft-°F
Thermal Heat Capacity for Composite Core	129.1	W-s/m-°C	21.9	W-s/ft-°F

ELECTRICAL SPECIFICATIONS

Maximum DC Electrical Resistance at 20°C / 68°F (1370-O at 63%IACS)	0.0373	ohm/km	0.0600	ohm/mile
Temperature Coefficient of Resistance	4.07	10 ⁻³ K ⁻¹	2.109	10 ⁻³ F ⁻¹
AC Nominal Resistance at 25°C / 77°F (surface temperature)	0.0410	ohm/km	0.0660	ohm/mile
AC Nominal Resistance at 75°C / 167°F (surface temperature)	0.0481	ohm/km	0.0775	ohm/mile
AC Nominal Resistance at 180°C / 356°F (surface temperature)	0.0635	ohm/km	0.1021	ohm/mile
AC Nominal Resistance at 200°C / 392°F (surface temperature)	0.0664	ohm/km	0.1069	ohm/mile
AC Current Rating at 180°C / 356°F (surface temperature) ⁽¹⁾	2,308 A			
AC Current Rating at 200°C / 392°F (surface temperature) ⁽¹⁾	2,445 A			


Geometric Mean Radius (GMR)

13.53 mm 0.0444 ft.

Inductive Reactance Ø0.3m (Ø0.98ft) radius

0.196 Ω.km-1 0.3154 ohm/mile

Capacitive Reactance Ø0.3m (Ø0.98ft) radius

0.166 MΩ.km 0.1031 Mohm-mile

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C / 77 °F ambient temperature, 0.61 m/s (2 ft/s) wind velocity with an angle of 90 °,
 1000 W/m² (92.9 W/ft²) solar radiation, 0.5 solar absorption coefficient,
 0.6 emissivity coefficient, Resistance AC at 60 Hz current frequency.

(2) Temperatures defined according to ASTM B987-20.

Reference standards for core properties: ASTM B987-20.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Rated specifications may slightly change depending on conductor manufacturer.

Revision 01

Ref. Document ST22-00103

Date 12-Sep-2023

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com
www.epsilon-cable.com