

TECHNICAL DATA SHEET

HVCRC® 230 - 40 Epsilon Advanced Conductors

EPSILON
CABLE

International size	REYKJAVIK
ASTM Size	ORIOLE
Technical designation	ECRC® 230-AL0/40-S1



Governing Units: Metric

STRANDING CONFIGURATION

	No. & Diameter of HVCRC core	1 x 7.11	mm
	Aluminium Layers Construction / height	20 TW x	2.93 mm
	1st layer composition and ϕ_{eq}	8 x	3.72 mm
	2nd layer composition and ϕ_{eq}	12 x	3.80 mm
	Lay Direction of outer layer	Right Hand (Z)	

CONDUCTOR PROPERTIES


Cross Sectional Area - Annealed Aluminium	223.1	mm ²
Cross Sectional Area - HVCRC Core	39.7	mm ²
Total Area of Conductor Cross Section	262.8	mm ²
Nominal equivalent Aluminium Area (1350-H19 at 61%IACS)	230.4	mm ²
Overall Diameter of Conductor	18.82	mm
Mass per unit length - Annealed Aluminium	617.3	kg/km
Mass per unit length - Core	73.5	kg/km
Mass per unit length - Conductor	690.8	kg/km
Ultimate Tensile Strength of Conductor	102.5	kN
Core Rated Tensile Strength	89.1	kN
Coefficient of Linear Expansion Above Thermal Kneepoint	1.3	10 ⁻⁶ K ⁻¹
Coefficient of Linear Expansion Below Thermal Kneepoint	16.82	10 ⁻⁶ K ⁻¹
Final Modulus of Elasticity Above Thermal Kneepoint	123	GPa
Final Modulus of Elasticity Below Thermal Kneepoint	65	GPa

THERMAL SPECIFICATIONS

Maximum Continuous Operating Temperature ⁽²⁾ (surface temperature)	180	°C
Maximum Emergency Temperature / 8760 Hours ⁽²⁾ (surface temperature)	200	°C
Thermal Heat Capacity for Annealed Aluminium Layers	589.5	W.s/m.°C
Thermal Heat Capacity for Composite Core	58.8	W.s/m.°C

ELECTRICAL SPECIFICATIONS

Maximum DC Electrical Resistance at 20°C (1370-O at 63%IACS)	0.1255	Ω.km ⁻¹
Temperature Coefficient of Resistance	4.03	10 ⁻³ K ⁻¹
AC Nominal Resistance at 25°C (surface temperature)	0.1287	Ω.km ⁻¹
AC Nominal Resistance at 75°C (surface temperature)	0.1539	Ω.km ⁻¹
AC Nominal Resistance at 160°C (surface temperature)	0.1967	Ω.km ⁻¹
AC Nominal Resistance at 180°C (surface temperature)	0.2068	Ω.km ⁻¹
AC Nominal Resistance at 200°C (surface temperature)	0.2169	Ω.km ⁻¹
AC Current Rating at 160°C (surface temperature) ⁽¹⁾	998	A
AC Current Rating at 180°C (surface temperature) ⁽¹⁾	1,060	A
AC Current Rating at 200°C (surface temperature) ⁽¹⁾	1,117	A

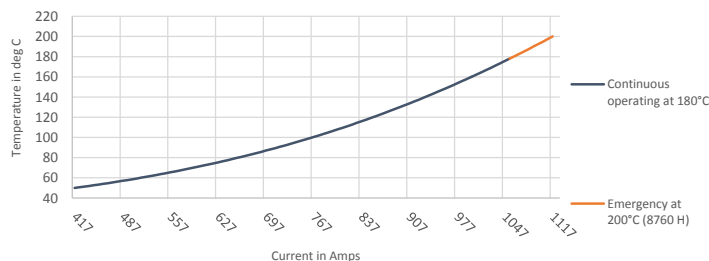

Geometric Mean Radius (GMR)	7.74	mm
Inductive Reactance Ø0.3m radius	0.231	Ω.km ⁻¹
Capacitive Reactance Ø0.3m radius	0.199	MΩ.km

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C ambient temperature,	0.61 m/s wind velocity with an angle of 90 °,
1000 W/m ² solar radiation,	0.5 solar absorption coefficient,
0.6 emissivity coefficient,	Resistance AC at 50 Hz current frequency.

(2) Temperatures defined according to ASTM B987-20.

Reference standards for core properties: ASTM B987-20.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Revision 02
Ref. Document ST21-00140
Date 12-Sep-2023

This document is the property of EPSILON COMPOSITE
contact@epsilon-cable.com
www.epsilon-cable.com