TECHNICAL DATA SHEET

ECRC® 190 - 28

Epsilon Advanced Conductors

EPSILON CABLE

International size	**ROVINJ**
ASTM Size	-
Technical designation	ECRC® 190-AL0/28-L1




Governing Units: Metric to US Customary (Unit conversion)

STRANDING CONFIGURATION		Metric		US Customary	
	*No. & Diameter of composite core*	1 x 5.97	mm	1 x 0.235	in.
	Aluminum layers construction / Height	16 TW x 2.78	mm	0.109	in.
	1st layer composition and Øeq	6 x 3.92	mm	0.154	in.
	2nd layer composition and Øeq	10 x 3.86	mm	0.152	in.
	Lay Direction of outer layer	Right Hand (Z)			

CONDUCTOR PROPERTIES				
Cross Sectional Area - Annealed Aluminum (1350-O at 63%IACS)	189.1	mm²	373.2	kcmil
Cross Sectional Area - Composite Core	28.0	mm²	0.0434	in.²
Total Area of Conductor Cross Section	217.1	mm²	0.3365	in.²
Nominal equivalent Aluminum Area (1350-H19 at 61%IACS)	195.3	mm²	385.5	kcmil
Overall Diameter of Conductor	17.09	mm	0.673	in.
Mass per unit length - Annealed Aluminum	523.1	kg/km	351.5	lb/kft
Mass per unit length - Core	52.6	kg/km	35.4	lb/kft
Mass per unit length - Conductor	575.7	kg/km	386.9	lb/kft
Ultimate Tensile Strength of Conductor	71.2	kN	16.0	kips
Core Rated Tensile Strength	59.8	kN	13.4	kips
Coefficient of Linear Expansion Above Thermal Kneepoint	1.6	10^{-6} K^{-1}	0.889	10^{-6} F^{-1}
Coefficient of Linear Expansion Below Thermal Kneepoint	18.04	10^{-6} K^{-1}	10.02	10^{-6} F^{-1}
Final Modulus of Elasticity Above Thermal Kneepoint	112	GPa	16.24	Msi
Final Modulus of Elasticity Below Thermal Kneepoint	62	GPa	9.04	Msi

THERMAL SPECIFICATIONS				
Maximum Continuous Operating Temperature[2] (surface temperature)	180	°C	356	°F
Maximum Emergency Temperature / 8760 Hours[2] (surface temperature)	200	°C	392	°F
Thermal Heat Capacity for Annealed Aluminum Layers	499.6	W-s/m-°C	84.6	W-s/ft-°F
Thermal Heat Capacity for Composite Core	42.1	W-s/m-°C	7.1	W-s/ft-°F

ELECTRICAL SPECIFICATIONS				
Maximum DC Electrical Resistance at 20°C / 68°F *(1370-O at 63%IACS)*	0.1481	ohm/km	0.2383	ohm/mile
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}	2.089	10^{-3} F^{-1}
AC Nominal Resistance at 25°C / 77°F (surface temperature)	0.1519	ohm/km	0.2444	ohm/mile
AC Nominal Resistance at 75°C / 167°F (surface temperature)	0.1816	ohm/km	0.2922	ohm/mile
AC Nominal Resistance at 180°C / 356°F (surface temperature)	0.2441	ohm/km	0.3928	ohm/mile
AC Nominal Resistance at 200°C / 392°F (surface temperature)	0.2560	ohm/km	0.4120	ohm/mile
AC Current Rating at 180°C / 356°F (surface temperature) [1]	946 A			
AC Current Rating at 200°C / 392°F (surface temperature) [1]	997 A			

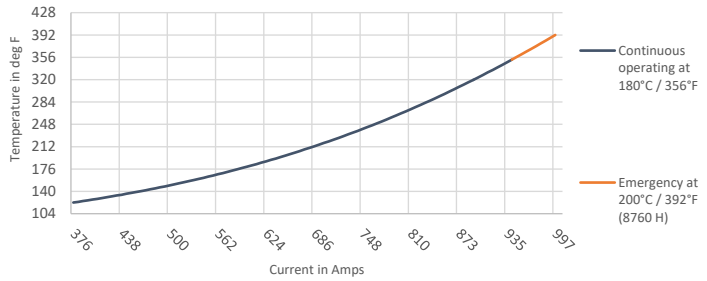

Geometric Mean Radius (GMR)				
	6.98	mm	0.0229	ft.
Inductive Reactance Ø0.3m (Ø0.98ft) radius				
	0.237	Ω.km-1	0.3814	ohm/mile
Capacitive Reactance Ø0.3m (Ø0.98ft) radius				
	0.205	MΩ.km	0.1274	Mohm-mile

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C / 77 °F ambient temperature, 0.61 m/s (2 ft/s) wind velocity with an angle of 90 °,

1000 W/m² (92.9 W/ft²) solar radiation, 0.5 solar absorption coefficient,

0.6 emissivity coefficient, Resistance AC at 60 Hz current frequency.

(2) Temperatures defined according to ASTM B987-20.

Reference standards for core properties: ASTM B987-20.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Rated specifications may slightly change depending on conductor manufacturer.

Revision 05

Ref. Document ST21-00143

Date 6-Jun-2025

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com

www.epsilon-cable.com