TECHNICAL DATA SHEET

ECRC® 230 - 28

Epsilon Advanced Conductors

EPSILON CABLE

International size	**COPENHAGEN**
ASTM Size	**LINNET**
Technical designation	ECRC® 230-AL0/28-L1




Governing Units: Metric to US Customary (Unit conversion)

STRANDING CONFIGURATION		Metric		US Customary	
	*No. & Diameter of composite core*	1 x 5.97	mm	1 x 0.235	in.
	Aluminum layers construction / Height	16 TW x 3.08	mm	0.121	in.
	1st layer composition and Øeq	6 x 4.20	mm	0.165	in.
	2nd layer composition and Øeq	10 x 4.19	mm	0.165	in.
	Lay Direction of outer layer	Right Hand (Z)			

CONDUCTOR PROPERTIES				
Cross Sectional Area - Annealed Aluminum (1350-O at 63%IACS)	221.3	mm²	436.8	kcmil
Cross Sectional Area - Composite Core	28.0	mm²	0.0434	in.²
Total Area of Conductor Cross Section	249.3	mm²	0.3865	in.²
Nominal equivalent Aluminum Area (1350-H19 at 61%IACS)	228.6	mm²	451.1	kcmil
Overall Diameter of Conductor	18.29	mm	0.720	in.
Mass per unit length - Annealed Aluminum	612.0	kg/km	411.2	lb/kft
Mass per unit length - Core	52.6	kg/km	35.4	lb/kft
Mass per unit length - Conductor	664.6	kg/km	446.6	lb/kft
Ultimate Tensile Strength of Conductor	73.1	kN	16.4	kips
Core Rated Tensile Strength	59.8	kN	13.4	kips
Coefficient of Linear Expansion Above Thermal Kneepoint	1.6	10^{-6} K^{-1}	0.889	10^{-6} F^{-1}
Coefficient of Linear Expansion Below Thermal Kneepoint	18.62	10^{-6} K^{-1}	10.34	10^{-6} F^{-1}
Final Modulus of Elasticity Above Thermal Kneepoint	112	GPa	16.24	Msi
Final Modulus of Elasticity Below Thermal Kneepoint	61	GPa	8.91	Msi

THERMAL SPECIFICATIONS				
Maximum Continuous Operating Temperature[2] (surface temperature)	180	°C	356	°F
Maximum Emergency Temperature / 8760 Hours[2] (surface temperature)	200	°C	392	°F
Thermal Heat Capacity for Annealed Aluminum Layers	584.5	W-s/m-°C	98.9	W-s/ft-°F
Thermal Heat Capacity for Composite Core	42.1	W-s/m-°C	7.1	W-s/ft-°F

ELECTRICAL SPECIFICATIONS				
Maximum DC Electrical Resistance at 20°C / 68°F *(1370-O at 63%IACS)*	0.1265	ohm/km	0.2036	ohm/mile
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}	2.089	10^{-3} F^{-1}
AC Nominal Resistance at 25°C / 77°F (surface temperature)	0.1300	ohm/km	0.2092	ohm/mile
AC Nominal Resistance at 75°C / 167°F (surface temperature)	0.1553	ohm/km	0.2499	ohm/mile
AC Nominal Resistance at 180°C / 356°F (surface temperature)	0.2086	ohm/km	0.3358	ohm/mile
AC Nominal Resistance at 200°C / 392°F (surface temperature)	0.2188	ohm/km	0.3521	ohm/mile
AC Current Rating at 180°C / 356°F (surface temperature) [1]	1,046 A			
AC Current Rating at 200°C / 392°F (surface temperature) [1]	1,102 A			

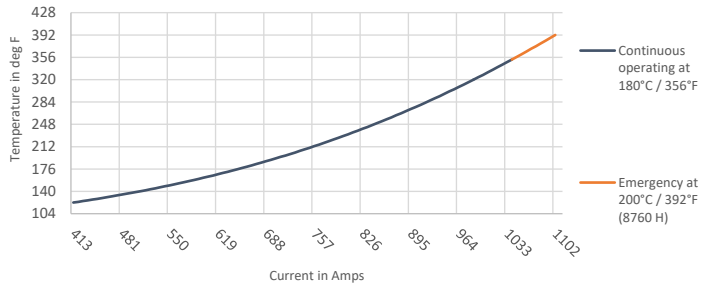

Geometric Mean Radius (GMR)	
7.42 mm	0.0243 ft.
Inductive Reactance Ø0.3m (Ø0.98ft) radius	
0.233 Ω.km-1	0.3750 ohm/mile
Capacitive Reactance Ø0.3m (Ø0.98ft) radius	
0.201 MΩ.km	0.1249 Mohm-mile

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C / 77 °F ambient temperature, 0.61 m/s (2 ft/s) wind velocity with an angle of 90 °,

1000 W/m² (92.9 W/ft²) solar radiation, 0.5 solar absorption coefficient,

0.6 emissivity coefficient, Resistance AC at 60 Hz current frequency.

(2) Temperatures defined according to ASTM B987-20.

Reference standards for core properties: ASTM B987-20.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Rated specifications may slightly change depending on conductor manufacturer.

Revision 03

Ref. Document ST21-00060

Date 6-Jun-2025

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com

www.epsilon-cable.com