
TECHNICAL DATA SHEET	Ultra Low Sag (ULS)	**ECRC® ULS 230 - 87** Epsilon Advanced Conductors	EPSILON CABLE

International size	**MONTE CARLO**
ASTM Size	-
Technical designation	ECRC® 230-AL0/87-X1




Governing Units: Metric to US Customary (Unit conversion)

STRANDING CONFIGURATION		Metric		US Customary	
	*No. & Diameter of the core*	1 x 10.54	mm	1 x 0.415	in.
	Aluminium layers construction / Height	28 TW x	2.56 mm	0.101	in.
	1st layer composition and Øeq	12 x	3.20 mm	0.126	in.
	2nd layer composition and Øeq	16 x	3.25 mm	0.128	in.
	Lay Direction of outer layer	Right Hand (Z)			

CONDUCTOR PROPERTIES				
Cross Sectional Area - Annealed Aluminum (1350-O at 63%IACS)	229.1	mm²	452.2	kcmil
Cross Sectional Area - Composite Core	87.3	mm²	0.1352	in.²
Total Area of Conductor Cross Section	316.4	mm²	0.4904	in.²
Nominal equivalent Aluminum Area (1350-H19 at 61%IACS)	236.6	mm²	467.0	kcmil
Overall Diameter of Conductor	20.78	mm	0.818	in.
Mass per unit length - Annealed Aluminum	635.2	kg/km	426.8	lb/kft
Mass per unit length - Core	160.5	kg/km	107.9	lb/kft
Mass per unit length - Conductor	795.7	kg/km	534.7	lb/kft
Ultimate Tensile Strength of Conductor	239.3	kN	53.8	kips
Core Rated Tensile Strength	225.6	kN	50.7	kips
Coefficient of Linear Expansion Above Thermal Kneepoint	0.75	10^{-6} K^{-1}	0.417	10^{-6} F^{-1}
Coefficient of Linear Expansion Below Thermal Kneepoint	11.81	10^{-6} K^{-1}	6.56	10^{-6} F^{-1}
Final Modulus of Elasticity Above Thermal Kneepoint	146	GPa	21.18	Msi
Final Modulus of Elasticity Below Thermal Kneepoint	80	GPa	11.62	Msi

THERMAL SPECIFICATIONS				
Maximum Continuous Operating Temperature[2] (surface temperature)	180	°C	356	°F
Maximum Emergency Temperature / 8760 Hours[2] (surface temperature)	200	°C	392	°F
Thermal Heat Capacity for Annealed Aluminum Layers	606.6	W-s/m-°C	102.7	W-s/ft-°F
Thermal Heat Capacity for Composite Core	128.4	W-s/m-°C	21.7	W-s/ft-°F

ELECTRICAL SPECIFICATIONS				
Maximum DC Electrical Resistance at 20°C / 68°F *(1370-O at 63%IACS)*	0.1225	ohm/km	0.1972	ohm/mile
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}	2.089	10^{-3} F^{-1}
AC Nominal Resistance at 25°C / 77°F (surface temperature)	0.1259	ohm/km	0.2026	ohm/mile
AC Nominal Resistance at 75°C / 167°F (surface temperature)	0.1505	ohm/km	0.2421	ohm/mile
AC Nominal Resistance at 180°C / 356°F (surface temperature)	0.2021	ohm/km	0.3252	ohm/mile
AC Nominal Resistance at 200°C / 392°F (surface temperature)	0.2119	ohm/km	0.3411	ohm/mile
AC Current Rating at 180°C / 356°F (surface temperature) [1]	1,106 A			
AC Current Rating at 200°C / 392°F (surface temperature) [1]	1,167 A			

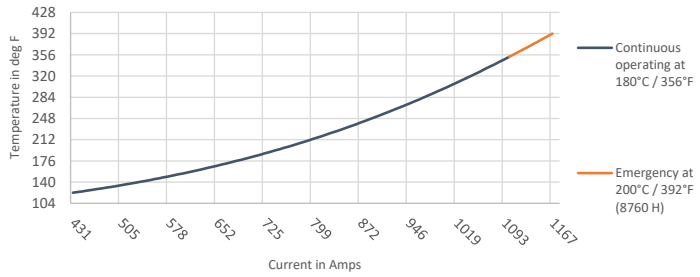

Geometric Mean Radius (GMR)				
	8.87	mm	0.0291	ft.
Inductive Reactance Ø0.3m (Ø0.98ft) radius				
	0.222	Ω.km-1	0.3573	ohm/mile
Capacitive Reactance Ø0.3m (Ø0.98ft) radius				
	0.194	MΩ.km	0.1205	Mohm-mile

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C / 77 °F ambient temperature, 0.61 m/s (2 ft/s) wind velocity with an angle of 90 °,

1000 W/m² (92.9 W/ft²) solar radiation, 0.5 solar absorption coefficient,

0.6 emissivity coefficient, Resistance AC at 60 Hz current frequency.

(2) Temperatures defined according to ASTM B987.

Reference standards for core properties: ASTM B987.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Revision 00

Ref. Document ST25-00056

Date 14-Aug-2025

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com

www.epsilon-cable.com