

TECHNICAL DATA SHEET	Ultra Low Sag (ULS)	**ECRC® ULS 770 - 75** Epsilon Advanced Conductors	EPSILON CABLE
International size	**LONDON**		
ASTM Size	**SAN ANTONIO**		
Technical designation	ECRC® 770-AL0/75-X1		



Governing Units: Metric to US Customary (Unit conversion)

STRANDING CONFIGURATION		Metric		US Customary	
	*No. & Diameter of the core*	1 x 9.78	mm	1 x 0.385	in.
	Aluminium layers construction / Height	36 TW x 3.94	mm	0.155	in.
	1st layer composition and Øeq	8 x 5.09	mm	0.200	in.
	2nd layer composition and Øeq	12 x 5.20	mm	0.205	in.
	3st layer composition and Øeq	16 x 5.24	mm	0.206	in.
	Lay Direction of outer layer	Right Hand (Z)			

CONDUCTOR PROPERTIES				
Cross Sectional Area - Annealed Aluminum (1350-O at 63%IACS)	761.6	mm²	1503.1	kcmil
Cross Sectional Area - Composite Core	75.1	mm²	0.1164	in.²
Total Area of Conductor Cross Section	836.8	mm²	1.2970	in.²
Nominal equivalent Aluminum Area (1350-H19 at 61%IACS)	786.6	mm²	1552.4	kcmil
Overall Diameter of Conductor	33.42	mm	1.316	in.
Mass per unit length - Annealed Aluminum	2,109.0	kg/km	1,417.2	lb/kft
Mass per unit length - Core	138.2	kg/km	92.9	lb/kft
Mass per unit length - Conductor	2,247.2	kg/km	1,510.1	lb/kft
Ultimate Tensile Strength of Conductor	240.0	kN	54.0	kips
Core Rated Tensile Strength	194.3	kN	43.7	kips
Coefficient of Linear Expansion Above Thermal Kneepoint	0.75	10^{-6} K^{-1}	0.417	10^{-6} F^{-1}
Coefficient of Linear Expansion Below Thermal Kneepoint	18.38	10^{-6} K^{-1}	10.21	10^{-6} F^{-1}
Final Modulus of Elasticity Above Thermal Kneepoint	146	GPa	21.18	Msi
Final Modulus of Elasticity Below Thermal Kneepoint	63	GPa	9.16	Msi
THERMAL SPECIFICATIONS				
Maximum Continuous Operating Temperature[2] (surface temperature)	180	°C	356	°F
Maximum Emergency Temperature / 8760 Hours[2] (surface temperature)	200	°C	392	°F
Thermal Heat Capacity for Annealed Aluminum Layers	2,014.1	W-s/m-°C	340.9	W-s/ft-°F
Thermal Heat Capacity for Composite Core	110.6	W-s/m-°C	18.7	W-s/ft-°F
ELECTRICAL SPECIFICATIONS				
Maximum DC Electrical Resistance at 20°C / 68°F *(1370-O at 63%IACS)*	0.0368	ohm/km	0.0592	ohm/mile
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}	2.089	10^{-3} F^{-1}
AC Nominal Resistance at 25°C / 77°F (surface temperature)	0.0405	ohm/km	0.0652	ohm/mile
AC Nominal Resistance at 75°C / 167°F (surface temperature)	0.0475	ohm/km	0.0764	ohm/mile
AC Nominal Resistance at 180°C / 356°F (surface temperature)	0.0624	ohm/km	0.1005	ohm/mile
AC Nominal Resistance at 200°C / 392°F (surface temperature)	0.0653	ohm/km	0.1051	ohm/mile
AC Current Rating at 180°C / 356°F (surface temperature) [1]	2,328 A			
AC Current Rating at 200°C / 392°F (surface temperature) [1]	2,466 A			

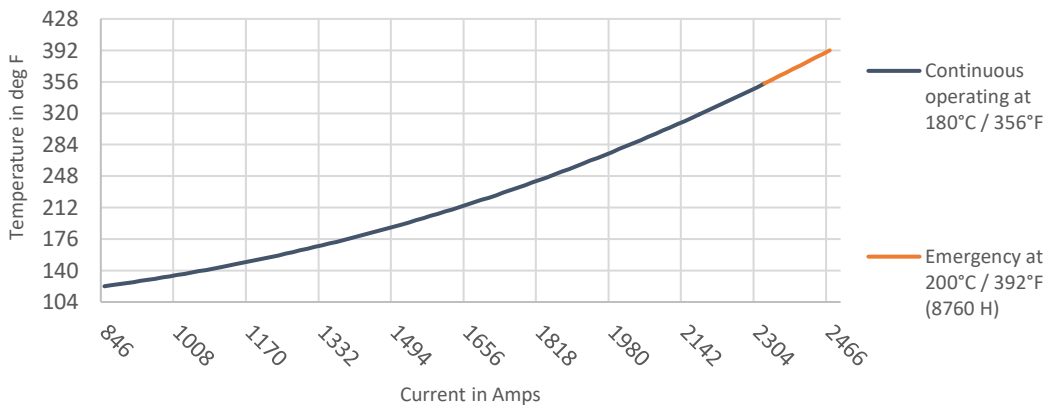

Geometric Mean Radius (GMR)			
13.46	mm	0.0442	ft.
Inductive Reactance Ø0.3m (Ø0.98ft) radius			
0.196	Ω.km-1	0.3154	ohm/mile
Capacitive Reactance Ø0.3m (Ø0.98ft) radius			
0.166	MΩ.km	0.1031	Mohm-mile

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C / 77 °F ambient temperature, 0.61 m/s (2 ft/s) wind velocity with an angle of 90 °,

1000 W/m² (92.9 W/ft²) solar radiation, 0.5 solar absorption coefficient,

0.6 emissivity coefficient, Resistance AC at 60 Hz current frequency.

(2) Temperatures defined according to ASTM B987.

Reference standards for core properties: ASTM B987.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Revision 00

Ref. Document ST25-00070

Date 14-Aug-2025

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com

www.epsilon-cable.com