
TECHNICAL DATA SHEET	Ultra Low Sag (ULS)	HVCRC® ULS 380 - 87 Epsilon Advanced Conductors	EPSILON CABLE
International size	**VANCOUVER**		
ASTM Size	-		
Technical designation	ECRC® 380-AL0/87-X1		



Governing Units: Metric

STRANDING CONFIGURATION



No. & Diameter of the core		1 x 10.54	mm
Aluminium layers construction / Height	28 TW x	3.62	mm
1st layer composition and Øeq	12 x	4.17	mm
2nd layer composition and Øeq	16 x	4.17	mm
Lay Direction of outer layer		Right Hand (Z)	

CONDUCTOR PROPERTIES


Cross Sectional Area - Annealed Aluminium	383.2	mm²
Cross Sectional Area - HVCRC Core	87.3	mm²
Total Area of Conductor Cross Section	470.5	mm²
Nominal equivalent Aluminium Area (1350-H19 at 61%IACS)	395.8	mm²
Overall Diameter of Conductor	25	mm
Mass per unit length - Annealed Aluminium	1,062.2	kg/km
Mass per unit length - Core	160.5	kg/km
Mass per unit length - Conductor	1,222.8	kg/km
Ultimate Tensile Strength of Conductor	248.6	kN
Core Rated Tensile Strength	225.6	kN
Coefficient of Linear Expansion **Above** Thermal Kneepoint	0.75	10^{-6} K^{-1}
Coefficient of Linear Expansion **Below** Thermal Kneepoint	14.62	10^{-6} K^{-1}
Final Modulus of Elasticity **Above** Thermal Kneepoint	146	GPa
Final Modulus of Elasticity **Below** Thermal Kneepoint	72	GPa

THERMAL SPECIFICATIONS

Maximum Continuous Operating Temperature[2] (surface temperature)	180	°C
Maximum Emergency Temperature / 8760 Hours[2] (surface temperature)	200	°C
Thermal Heat Capacity for Annealed Aluminium Layers	1,014.4	W.s/m.°C
Thermal Heat Capacity for Composite Core	128.4	W.s/m.°C

ELECTRICAL SPECIFICATIONS

Maximum DC Electrical Resistance at 20°C *(1370-O at 63%IACS)*	0.0730	$\Omega.km^{-1}$
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}
AC Nominal Resistance at 25°C (surface temperature)	0.0756	$\Omega.km^{-1}$
AC Nominal Resistance at 75°C (surface temperature)	0.0901	$\Omega.km^{-1}$
AC Nominal Resistance at 180°C (surface temperature)	0.1208	$\Omega.km^{-1}$
AC Nominal Resistance at 200°C (surface temperature)	0.1266	$\Omega.km^{-1}$
AC Current Rating at 180°C (surface temperature) [1]	1,519	A
AC Current Rating at 200°C (surface temperature) [1]	1,604	A

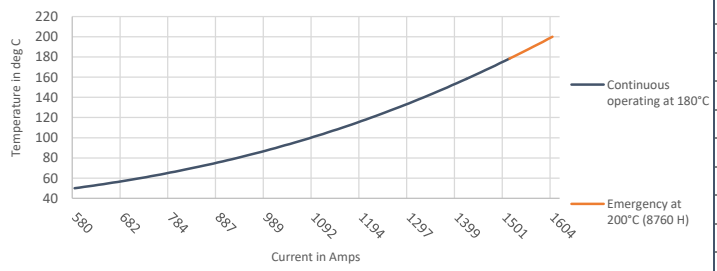

Geometric Mean Radius (GMR)	
10.39	mm
Inductive Reactance Ø0.3m radius	
-	$\Omega.km^{-1}$
Capacitive Reactance Ø0.3m radius	
-	MΩ.km

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C ambient temperature, 0.61 m/s wind velocity with an angle of 90 °,
1000 W/m² solar radiation, 0.5 solar absorption coefficient,
0.6 emissivity coefficient, Resistance AC at 50 Hz current frequency.

(2) Temperatures defined according to ASTM B987.

Reference standards for core properties: ASTM B987.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Revision	*00*
Ref. Document	*ST25-00058*
Date	*14-Aug-2025*

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com
www.epsilon-cable.com