
TECHNICAL DATA SHEET	Ultra Low Sag (ULS)	HVCRC® ULS 600 - 71 Epsilon Advanced Conductors	EPSILON CABLE


International size	**ROME**
ASTM Size	**ARLINGTON**
Technical designation	ECRC® 600-AL0/71-X1



Governing Units: Metric

STRANDING CONFIGURATION			
	*No. & Diameter of the core*	1 x 9.53	mm
	Aluminium layers construction / Height	36 TW x 3.39	mm
	1st layer composition and Øeq	8 x 4.57	mm
	2nd layer composition and Øeq	12 x 4.60	mm
	3st layer composition and Øeq	16 x 4.59	mm
	Lay Direction of outer layer	Right Hand (Z)	

CONDUCTOR PROPERTIES		
Cross Sectional Area - Annealed Aluminium	595.3	mm²
Cross Sectional Area - HVCRC Core	71.3	mm²
Total Area of Conductor Cross Section	666.6	mm²
Nominal equivalent Aluminium Area (1350-H19 at 61%IACS)	614.8	mm²
Overall Diameter of Conductor	29.87	mm
Mass per unit length - Annealed Aluminium	1,647.0	kg/km
Mass per unit length - Core	131.2	kg/km
Mass per unit length - Conductor	1,778.2	kg/km
Ultimate Tensile Strength of Conductor	220.2	kN
Core Rated Tensile Strength	184.5	kN
Coefficient of Linear Expansion **Above** Thermal Kneepoint	0.75	10^{-6} K^{-1}
Coefficient of Linear Expansion **Below** Thermal Kneepoint	17.63	10^{-6} K^{-1}
Final Modulus of Elasticity **Above** Thermal Kneepoint	146	GPa
Final Modulus of Elasticity **Below** Thermal Kneepoint	65	GPa
THERMAL SPECIFICATIONS		
Maximum Continuous Operating Temperature(2) (surface temperature)	180	°C
Maximum Emergency Temperature / 8760 Hours(2) (surface temperature)	200	°C
Thermal Heat Capacity for Annealed Aluminium Layers	1,572.9	W.s/m.°C
Thermal Heat Capacity for Composite Core	105.0	W.s/m.°C
ELECTRICAL SPECIFICATIONS		
Maximum DC Electrical Resistance at 20°C *(1370-O at 63%IACS)*	0.0471	Ω.km^{-1}
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}
AC Nominal Resistance at 25°C (surface temperature)	0.0497	Ω.km^{-1}
AC Nominal Resistance at 75°C (surface temperature)	0.0589	Ω.km^{-1}
AC Nominal Resistance at 180°C (surface temperature)	0.0785	Ω.km^{-1}
AC Nominal Resistance at 200°C (surface temperature)	0.0823	Ω.km^{-1}
AC Current Rating at 180°C (surface temperature) (1)	1,998	A
AC Current Rating at 200°C (surface temperature) (1)	2,112	A

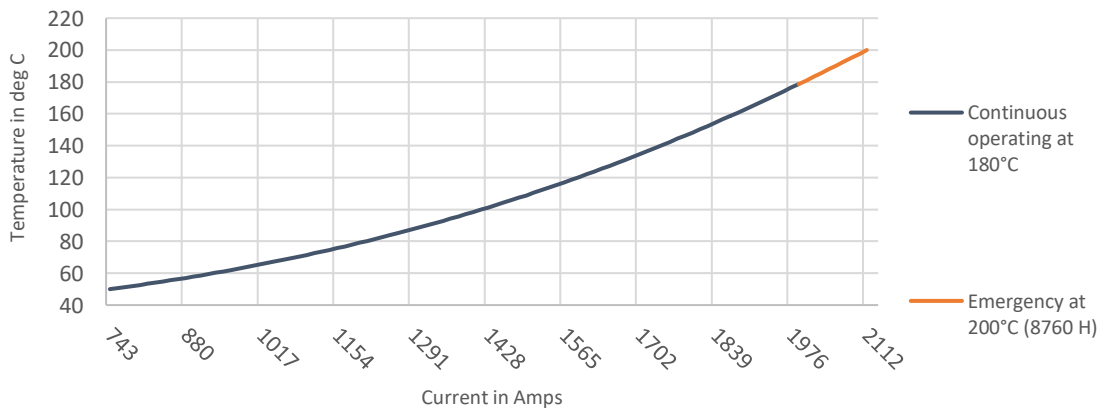

Geometric Mean Radius (GMR)	
12.11	mm
Inductive Reactance Ø0.3m radius	
0.203	Ω.km^{-1}
Capacitive Reactance Ø0.3m radius	
0.173	MΩ.km

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C ambient temperature, 0.61 m/s wind velocity with an angle of 90 °,

1000 W/m² solar radiation, 0.5 solar absorption coefficient,

0.6 emissivity coefficient, Resistance AC at 50 Hz current frequency.

(2) Temperatures defined according to ASTM B987.

Reference standards for core properties: ASTM B987.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Revision 00

Ref. Document ST25-00064

Date 14-Aug-2025

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com

www.epsilon-cable.com