
TECHNICAL DATA SHEET	Ultra Low Sag (ULS)	HVCRC® ULS 740 - 71 Epsilon Advanced Conductors	EPSILON CABLE

International size	**MUNICH**
ASTM Size	**BEAUMONT**
Technical designation	ECRC® 740-AL0/71-X1




Governing Units: Metric

STRANDING CONFIGURATION



No. & Diameter of the core		1 x 9.53	mm
Aluminium layers construction / Height	36 TW x	3.89	mm
1st layer composition and Øeq	8 x	5.00	mm
2nd layer composition and Øeq	12 x	5.11	mm
3st layer composition and Øeq	16 x	5.16	mm
Lay Direction of outer layer		Right Hand (Z)	

CONDUCTOR PROPERTIES		
Cross Sectional Area - Annealed Aluminium	737.6	mm²
Cross Sectional Area - HVCRC Core	71.3	mm²
Total Area of Conductor Cross Section	808.9	mm²
Nominal equivalent Aluminium Area (1350-H19 at 61%IACS)	761.8	mm²
Overall Diameter of Conductor	32.87	mm
Mass per unit length - Annealed Aluminium	2,042.0	kg/km
Mass per unit length - Core	131.2	kg/km
Mass per unit length - Conductor	2,173.2	kg/km
Ultimate Tensile Strength of Conductor	228.8	kN
Core Rated Tensile Strength	184.5	kN
Coefficient of Linear Expansion **Above** Thermal Kneepoint	0.75	10^{-6} K^{-1}
Coefficient of Linear Expansion **Below** Thermal Kneepoint	18.45	10^{-6} K^{-1}
Final Modulus of Elasticity **Above** Thermal Kneepoint	146	GPa
Final Modulus of Elasticity **Below** Thermal Kneepoint	63	GPa
THERMAL SPECIFICATIONS		
Maximum Continuous Operating Temperature(2) (surface temperature)	180	°C
Maximum Emergency Temperature / 8760 Hours(2) (surface temperature)	200	°C
Thermal Heat Capacity for Annealed Aluminium Layers	1,950.1	W.s/m.°C
Thermal Heat Capacity for Composite Core	105.0	W.s/m.°C
ELECTRICAL SPECIFICATIONS		
Maximum DC Electrical Resistance at 20°C *(1370-O at 63%IACS)*	0.0380	Ω.km^{-1}
Temperature Coefficient of Resistance	4.03	10^{-3} K^{-1}
AC Nominal Resistance at 25°C (surface temperature)	0.0408	Ω.km^{-1}
AC Nominal Resistance at 75°C (surface temperature)	0.0481	Ω.km^{-1}
AC Nominal Resistance at 180°C (surface temperature)	0.0638	Ω.km^{-1}
AC Nominal Resistance at 200°C (surface temperature)	0.0668	Ω.km^{-1}
AC Current Rating at 180°C (surface temperature) (1)	2,288	A
AC Current Rating at 200°C (surface temperature) (1)	2,423	A

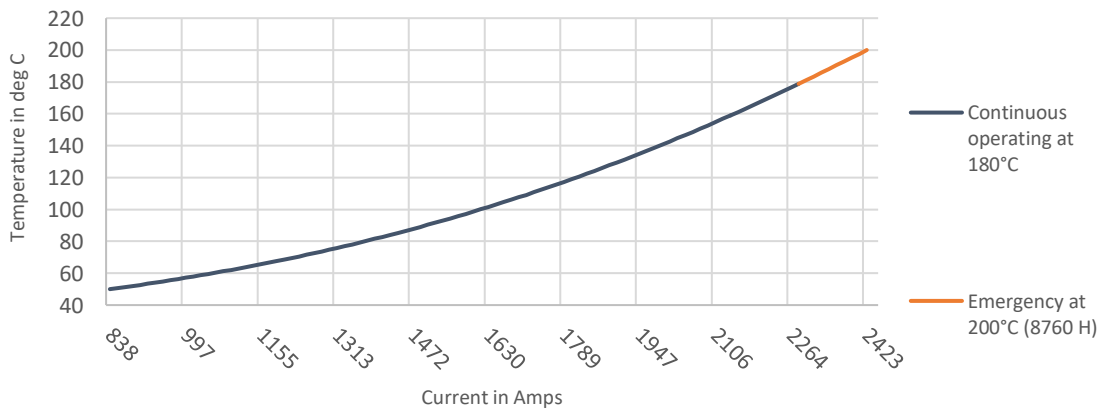

Geometric Mean Radius (GMR)	
13.22	mm
Inductive Reactance Ø0.3m radius	
0.197	Ω.km^{-1}
Capacitive Reactance Ø0.3m radius	
0.167	MΩ.km

(1) Ampacity calculations based on IEEE Standard 738-2012, according to the following data:

25 °C ambient temperature, 0.61 m/s wind velocity with an angle of 90 °,

1000 W/m² solar radiation, 0.5 solar absorption coefficient,

0.6 emissivity coefficient, Resistance AC at 50 Hz current frequency.

(2) Temperatures defined according to ASTM B987.

Reference standards for core properties: ASTM B987.

Reference standards for electrical specifications: IEC 62219.

Reference standards for stranding parameters: ASTM B857-14/IEC 62219.

Depending on conductor manufacturer rated specifications may slightly change.

Revision 00

Ref. Document ST25-00068

Date 14-Aug-2025

This document is the property of EPSILON COMPOSITE

contact@epsilon-cable.com

www.epsilon-cable.com